





MACO PROTECT

DOOR LOCKS
G-TS NEW
LIFT LEVER DOOR LOCK

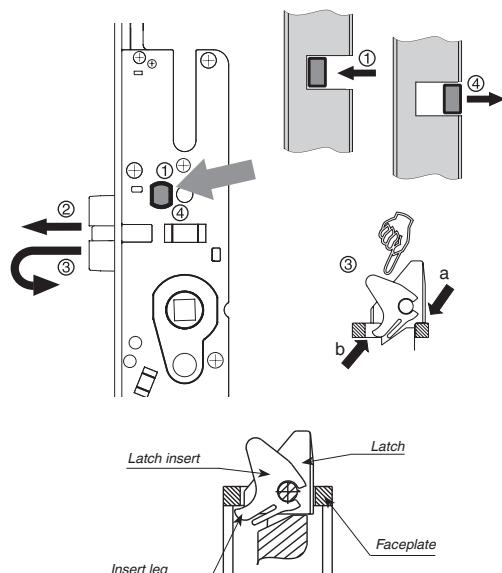


- ① Push the Button.
- ② Remove the latch.
- ③ Remove and reverse the latch and replace it into the faceplate slot (a).
Ensure that the leg on the latch insert locates under the faceplate (b).
Then push the latch fully in.
- ④ Ensure that the button fully returns.

Order No.	BS (mm)	Lock Style	HC (mm)	■ (mm)
232010	28	4 x i.S. Cam	92	8
232011	35	4 x i.S. Cam	92	8
232013	45	4 x i.S. Cam	92	8

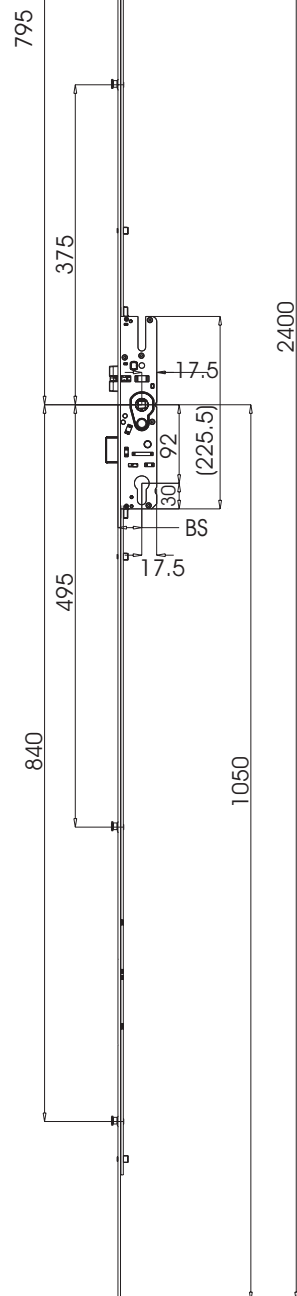

**MACO
PROTECT**

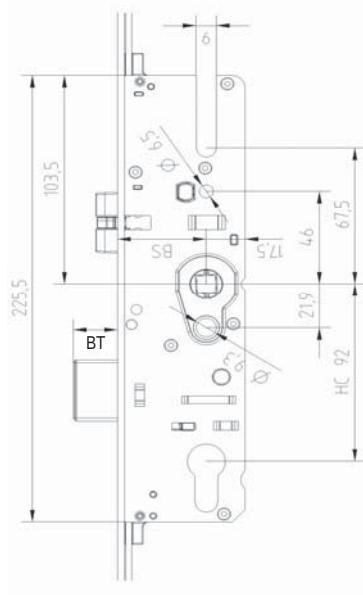


BS	BT
28mm	16mm
35mm	20mm
45mm	20mm

BS - Backset

BT - Bolt Throw

HC - Handle Centres

**MACO DOOR & WINDOW
HARDWARE (U.K.) LTD**
EUROLINK INDUSTRIAL CENTRE
CASTLE ROAD, SITTINGBOURNE
KENT ME10 3LY
TEL +44 (0)1795 433900
FAX +44 (0)1795 433901
maco@macouk.net

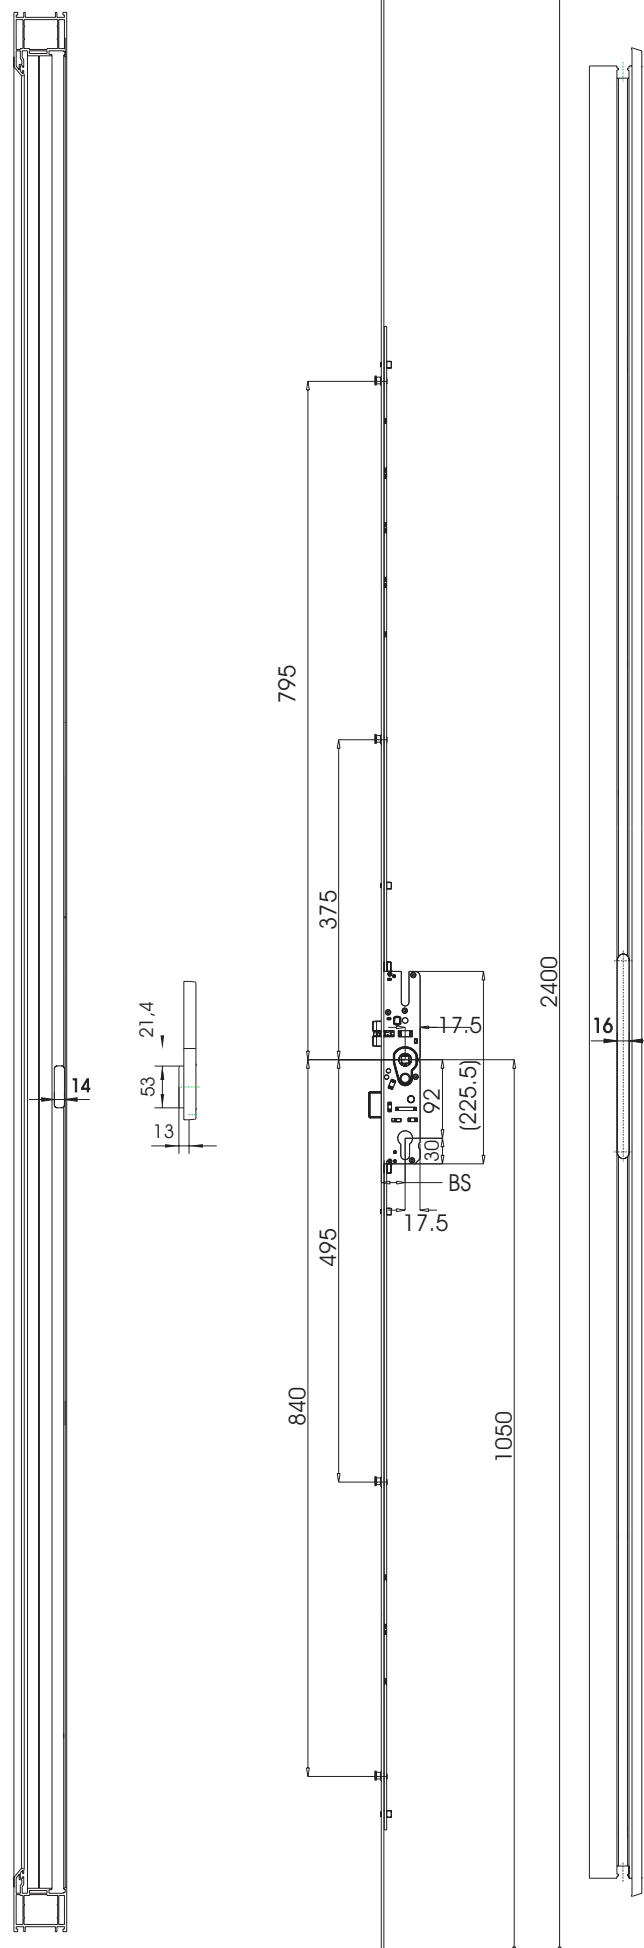

Ref.G-TS New 4iS Spec - Date: 11.May.07
All rights reserved and subject to change.